

# D-Series™ Commercial Pool Pump

## Cast Iron Self-Priming Centrifugal Commercial Pool Pump



Especially designed for commercial and public swimming pools and spas, aquatic facilities, water parks and fountain applications where high performance and self-priming characteristics are desired. These self-priming, high performance pumps are available in high head and medium head models, providing a complete range of performance characteristics. Motors are open drip-proof, continuous duty rated 3450 RPM.

D Series™ Cast Iron Self-Priming Centrifugal Commercial Pool Pump

### Ordering Information

Product	Voltage	Amps <sup>1</sup>	HP	Primary Listings and Certifications <sup>3</sup>	Port Size (NPT)	Carton Wt. (Lbs.)	Curve Key
<b>STANDARD EFFICIENCY SINGLE PHASE</b>							
DHH-169	230	17	3	NSF <sup>2</sup>	1-1/2 in.	135	A
DMH-171	230	17	3	NSF <sup>2</sup>	2 in.	135	C
DHJ-170	230	28	5	NSF <sup>2</sup>	2 in.	178	B
DMJ-172	230	28	5	NSF <sup>2</sup>	2-1/2 in.	178	D
<b>STANDARD EFFICIENCY THREE PHASE</b>							
DHH3-169	230/460	10.6-9.6/4.8	3	NSF <sup>2</sup>	1-1/2 in.	135	A
DMH3-171	230/460	10.6-9.6/4.8	3	NSF <sup>2</sup>	2 in.	135	C
DHJ3-170	230/460	16.8-15.2/7.6	5	NSF <sup>2</sup>	2 in.	178	B
DMJ3-172	230/460	16.8-15.2/7.6	5	NSF <sup>2</sup>	2-1/2 in.	178	D

\* 200 Volt models available. Contact factory for details.


<sup>1</sup> Dimensions and Max Load Amps may vary per motor manufacturer.

<sup>2</sup> 'NSF(1)' indicates that pump bears a NSF mark signifying evaluation to NSF Standard 50 For Self-Priming Centrifugal Pumps For Swimming Pools, Spas and Hot Tubs when installed with a NSF certified Hair and Lint Strainer.

<sup>3</sup> Product may have been evaluated to other state and local regulatory standards. Listing status may change. Always confirm status with appropriate agency if in doubt.

Note: See pages 204 and 205 for Hair and Lint Strainer Packages.


### Dimensions and Performance

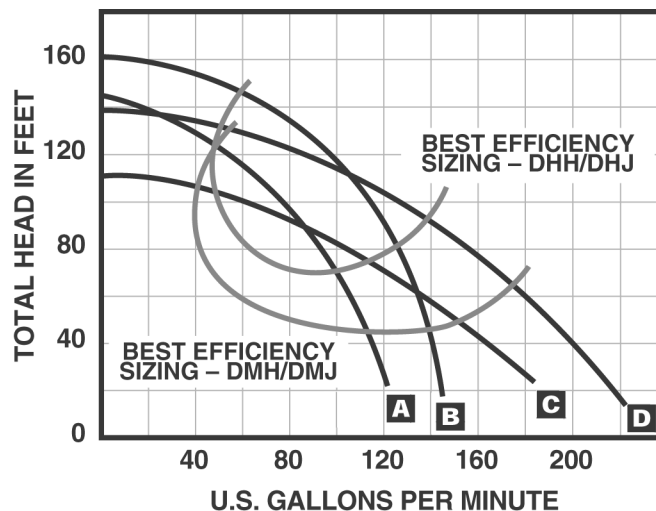

# D-Series™ Commercial Pool Pump (Cont'd)

## Cast Iron Self-Priming Centrifugal Commercial Pool Pump

### Dimensions and Performance

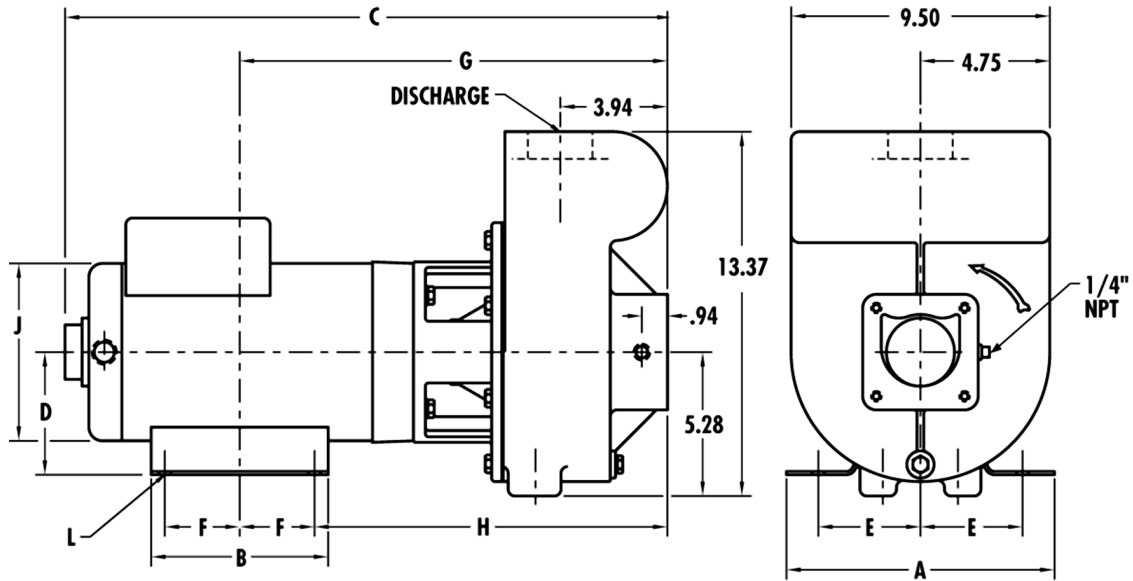

Note: "L" mounting dimension: .44 Slot = 3/8 in. Bolt .34 Diameter = 5/16 in.

Catalog Number	HP	Discharge (NPT)	A	B	C*	D	E	F	G	H	J	L
DHH-169	3	1-1/2	8.75	6.50	21.37	4.50	3.75	2.25	15.21	12.96	6.51	.44 SLOT
DHH3-169	3	1-1/2	6.50	6.50	19.87	3.50	2.75	2.50	14.45	12.20	6.51	.34 DIA.
DHJ-172	5	2	8.75	6.50	22.12	4.50	3.75	2.75	15.71	12.96	6.51	.44 SLOT
DHJ3-172	5	2	8.75	6.50	21.62	4.50	3.75	2.25	15.21	12.96	6.50	.44 SLOT
DMH-171	3	2	8.75	6.50	21.37	4.50	3.75	2.25	15.21	12.96	6.51	.44 SLOT
DMH3-171	3	2	6.50	6.50	19.87	3.50	2.75	2.50	14.45	12.20	6.51	.34 DIA.
DMJ-172	5	2-1/2	8.75	6.50	22.12	4.50	3.75	2.75	15.71	12.96	6.51	.44 SLOT
DMJ3-172	5	2-1/2	8.75	6.50	21.62	4.50	3.75	2.25	15.21	12.96	6.50	.44 SLOT