

SuperFlo® Pumps



SuperFlo Pump

Featured Highlights

- SuperFlo by Pentair Pool Products® is a direct replacement for the Hayward® Super Pump® *
- Extremely quiet operation
- Unionized fittings (1-1/2 in. internal slip and 2 in. external slip)
- Cam and Ramp™ Lid
- Heavy-duty, high service factor 56 square flange motor
- Integral volute and pot reduce hydraulic noise

The SuperFlo® pumps are specifically designed to be the best choice for a variety of inground pools. The SuperFlo features thick walled body parts, a heavy-duty 56 square flange motor, and highly engineered hydraulics. SuperFlo's silent running capability and small footprint allow it to easily drop into a compact equipment pad.

Ordering Information

Product	Model	Voltage	Full Load Amps	HP	SF	SFHP	Primary Listings and Certifications ³	Port Size (NPT)	Carton Wt. (Lbs.)	Curve Key
ENERGY EFFICIENT SINGLE SPEED										
348021	SF-N1-1/2FE	115/208-230	8.8/4.5-4.4	1/2	1.90	0.95	UL ¹	1.5 in. x 1.5 in.	38	E
348022	SF-N1-3/4FE	115/208-230	8.8/4.5-4.4	3/4	1.67	1.25	UL ¹	1.5 in. x 1.5 in.	38	F
348023	SF-N1-1AE	115/208-230	11.2/6.0-5.6	1	1.25	1.25	UL ¹	1.5 in. x 1.5 in.	38	G
348024	SF-N1-1-1/2AE	115/208-230	14.8/7.8-7.4	1-1/2	1.10	1.65	UL ¹	1.5 in. x 1.5 in.	40	H
348025	SF-N1-2AE	208-230	9.6-8.8	2	1.10	2.20	UL ¹	1.5 in. x 1.5 in.	48	I
348026	SF-N1-2-1/2AE	208-230	11.0-10.2	2-1/2	1.04	2.60	UL ¹	1.5 in. x 1.5 in.	54	J
STANDARD EFFICIENCY SINGLE SPEED										
340036	SF-N1-1/2F	115/230	10.8/5.4	1/2	1.95	0.95	UL ¹ , NSF ²	1.5 in. x 1.5 in.	38	E
340037	SF-N1-3/4A	115/230	10.8/5.4	3/4	1.25	0.93	UL ¹ , NSF ²	1.5 in. x 1.5 in.	38	F
340038	SF-N1-1A	115/230	14.2/7.1	1	1.25	1.25	UL ¹ , NSF ²	1.5 in. x 1.5 in.	38	G
340039	SF-N1-1-1/2A	115/230	16.0/8.0	1.5	1.10	1.65	UL ¹ , NSF ²	1.5 in. x 1.5 in.	40	H
340040	SF-N1-2A	115/230	22.4/11.2	2	1.10	2.20	UL ¹ , NSF ²	1.5 in. x 1.5 in.	48	I
340041	SF-N1-2-1/2A	230	11.5	2-1/2	1.04	2.60	UL ¹ , NSF ²	1.5 in. x 1.5 in.	54	J
ENERGY EFFICIENT TWO SPEED 3450 RPM, LOW SPEED 1725 RPM										
341111	SF-N2-3/4A	115	14.6/4.7	3/4	1.67	1.25	UL ¹ , NSF ²	1.5 in. x 1.5 in.	39	A, F
340042	SF-N2-1A	230	6.0/2.3	1	1.25	1.25	UL ¹ , NSF ²	1.5 in. x 1.5 in.	39	B, G
340043	SF-N2-1-1/2A	230	7.8/3.0	1-1/2	1.10	1.65	UL ¹ , NSF ²	1.5 in. x 1.5 in.	41	C, H
340044	SF-N2-2A	230	10.0/3.5	2	1.10	2.20	UL ¹ , NSF ²	1.5 in. x 1.5 in.	49	D, I
ACCESSORIES										
350157	Union Kit – 1-1/2 in. Internal Slip x 2 in. External Slip (includes 2 unions as pictured above)									

¹ 'UL' indicates that pump bears a UL mark signifying evaluation to U.S. Standards UL1081 for Permanently Connected Swimming Pool and Spa Pumps and to Canadian Standards CAN/CSA C22.2 No. 108-01 Liquid Pumps For Swimming Pools Only (Enclosure 3).

² 'NSF' indicates that pump bears a NSF mark signifying evaluation to NSF Standard 50 For Self-Priming Centrifugal Pumps For Swimming Pools Only.






³ Product may have been evaluated to other state and local regulatory standards. Listing status may change. Always confirm status with appropriate agency if in doubt.

* Hayward® and Super Pump® are registered trademarks of Hayward Industries, Inc.

SuperFlo® Pumps (Cont'd)

Dimensions and Performance

Pentair Pool Products
SuperFlo Series Performance Curves

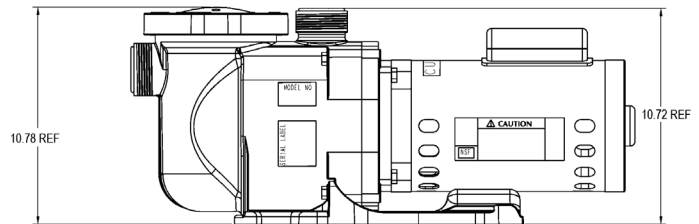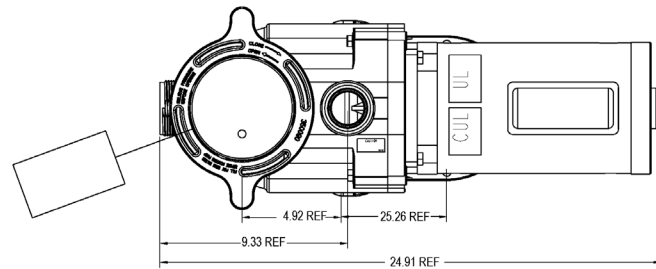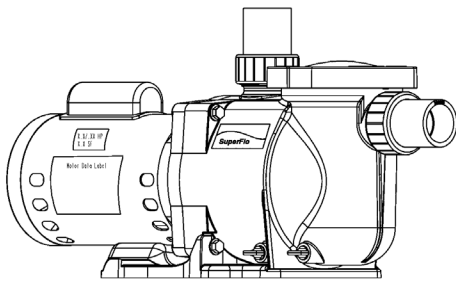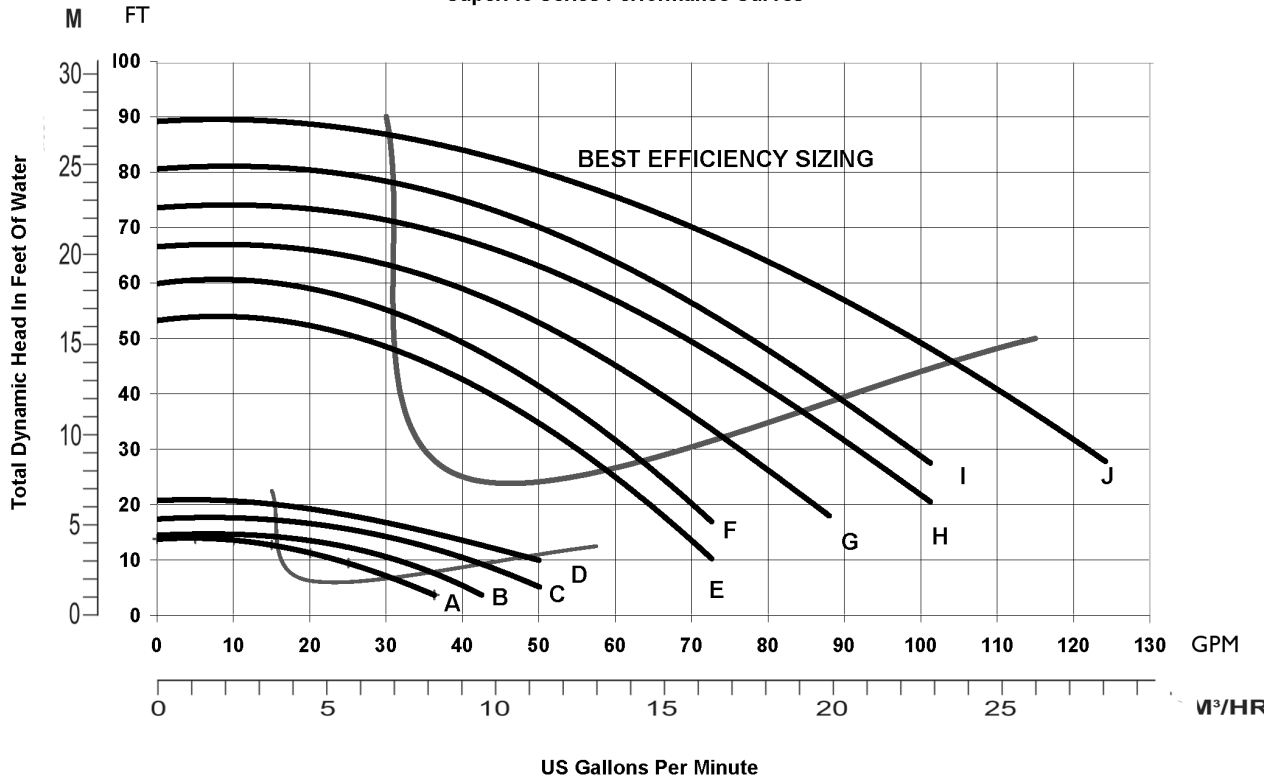

See page 486 for replacement parts.