

# C/CC Series™ Commercial Pool Pump

## Bronze or Cast Iron



C/CC Series™ Commercial Pool Pump

For semi-commercial and commercial swimming pool and spa recirculation. Available in high head and medium head models, providing a complete range of performance characteristics. Available in 3–5 HP models with 2-1/2 in. NPT suction and 2 in. NPT discharge ports. (Non self-primer, requires flooded suction installation.) Motors are open drip-proof, continuous duty rated 3450 RPM.

### Ordering Information

Product	Voltage	Amps <sup>3</sup>	HP	Primary Listings and Certifications <sup>2</sup>	Port Size (NPT)	Carton Wt. (Lbs.)	Curve Key
<b>SINGLE PHASE CAST BRONZE</b>							
CMH-136	230	14.0	3	NSF <sup>1</sup>	2-1/2 in. x 2 in.	111	B
CHH-137	230	14.0	3	NSF <sup>1</sup>	2-1/2 in. x 2 in.	116	A
CHJ-138	230	21.5	5	NSF <sup>1</sup>	2-1/2 in. x 2 in.	131	C
<b>SINGLE PHASE CAST IRON</b>							
CCMH-136S	230	14.0	3	NSF <sup>1</sup>	2-1/2 in. x 2 in.	106	B
CCHH-137S	230	14.0	3	NSF <sup>1</sup>	2-1/2 in. x 2 in.	106	A
CCHJ-138	230	21.5	5	NSF <sup>1</sup>	2-1/2 in. x 2 in.	126	C
<b>THREE PHASE CAST BRONZE</b>							
CMH3-136	230/460	16.6/8.0	3	NSF <sup>1</sup>	2-1/2 in. x 2 in.	91	B
CHH3-137	230/460	16.6/8.0	3	NSF <sup>1</sup>	2-1/2 in. x 2 in.	91	A
CHJ3-138	230/460	27.6/12.0	5	NSF <sup>1</sup>	2-1/2 in. x 2 in.	115	C
<b>THREE PHASE CAST IRON</b>							
CCMH3-136S	230/460	16.6/8.0	3	NSF <sup>1</sup>	2-1/2 in. x 2 in.	86	B
CCHH3-137S	230/460	16.6/8.0	3	NSF <sup>1</sup>	2-1/2 in. x 2 in.	86	A
CCHJ3-138S	230/460	27.6/12.0	5		2-1/2 in. x 2 in.	110	C

\* 200 Volt models available. Contact factory for availability.

<sup>1</sup> 'NSF(1)' indicates that pump bears a NSF mark signifying evaluation to NSF Standard 50 For Self-Priming Centrifugal Pumps For Swimming Pools, Spas and Hot Tubs when installed with a NSF certified Hair and Lint Strainer.



<sup>2</sup> Product may have been evaluated to other state and local regulatory standards. Listing status may change. Always confirm status with appropriate agency if in doubt.

<sup>3</sup> Dimensions and Max Load Amps may vary per motor manufacturer.

# C/CC Series™ Commercial Pool Pump (Cont'd)

## Bronze or Iron Cast

### Dimensions and Performance

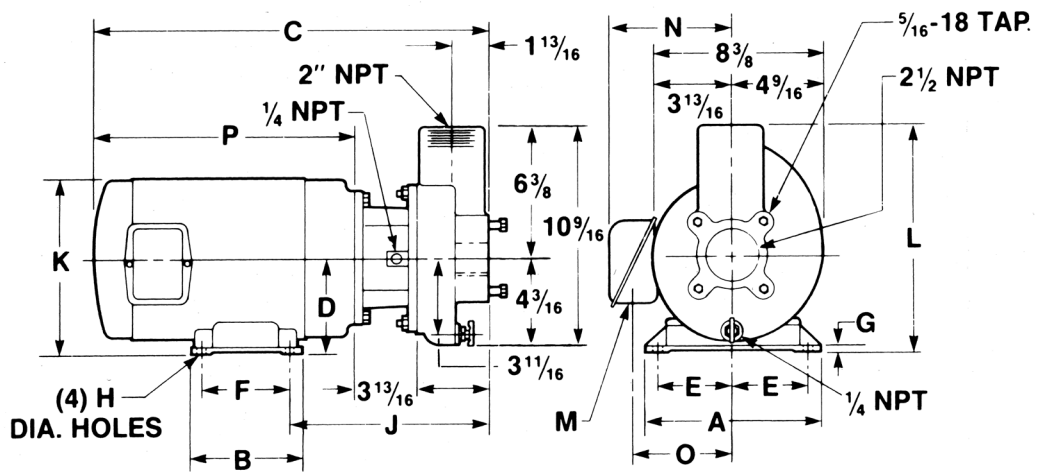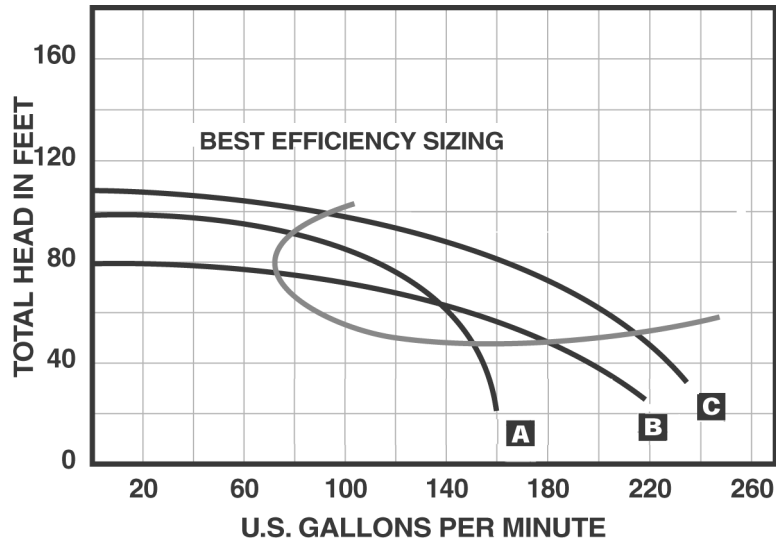

### Ordering Information

Catalog Number	A	B	C*	D	E	F	G*	H*	J	K	L	M*	N*	O*	P*
CHH3-137 CMH3-136	7	6	18-13/32	3-1/2	2-3/4	5	9/32	11/32	9-9/32	7-7/32	9-7/8	3/4	6-29/32	5-13/32	11
CHH-137 CMH-136	9	6-1/2	21-1/2	4-1/2	3-3/4	4-1/2	7/16	7/16	10-5/16	9-23/32	10-7/8	3/4	8-1/8	6-1/2	14-1/8
CHJ3-138 CHJ-138	9	7-1/2	22-1/2	4-1/2	3-3/4	5-1/2	7/16	7/16	10-5/16	9-23/32	10-7/8	3/4	9	6-15/16	15-1/8

All dimensions shown in inches.

See pages 516–517 for replacement parts.